


MULTIREG S-CONTROL 3600W 16A
EOL

Thermostat White RAL 9010

Art.no 5430333

GTIN 7071236008316

Multireg S-Control is an electronic thermostat with four functions. The thermostat is easy to install and program, and the design makes it very user-friendly. The thermostat has a setback temperature option.

Multireg S-Control is equipped with a 2-pole switch, and fits System 55 frames.

PRODUCT FEATURES

- Floor sensor
- Internal room sensor
- Power regulator
- Temperature limiter

PRODUCT DATA

| | |
|--------------------------------------|----------------|
| Ambient temperature range in use | 5 to 40°C |
| Ambient temperature range in storage | -30 to 70°C |
| Min/max installation temperature | 0 to 50°C |
| Min. and max ambient humidity (RH%) | 10 to 85% |
| Colour | White RAL 9010 |

THERMOSTAT DATA

| | |
|------------------------------------|-------------------------------------|
| Regulation temperature | 5 to 40°C |
| Compatible NTC-sensors (kΩ @ 25°C) | 10 |
| Power regulator | Timed cycle 0-30 minutes |
| Hysteresis | 0,3 to 3,0 (default hysteresis 0,5) |
| Ohm value at 25°C | 10kΩ |
| Max length of NTC sensor | 50m |

ADDITIONAL INFO

| | |
|----------------|----------|
| IP Code | IP21 |
| Certification | CE |
| Customs number | 90321000 |

ELECTRO TECHNICAL DATA

| | |
|-----------------------------------|---------------------------|
| Voltage | 230VAC 50Hz |
| Voltage Output | 230VAC 50Hz |
| Grounding | No |
| Switch type | Two-pole switch |
| Own power usage | 0.5W |
| Max load (resistive load) | 3600W |
| Max load (resistive load) | 16A |
| Connection terminals diameter | 0.2 to 2.5mm ² |
| Max tightening torque connections | 2N·m |
| Connection type | Screw clamps |



PRODUCT DIMENSIONS

| | | | |
|-------------------------|--------|--------------------|------|
| Product height/diameter | 86mm | Product Width | 86mm |
| Product length | 49.5mm | Product net weight | 210g |

MAINTENANCE

The device is maintenance-free. Indoor use only.

ADDITIONAL INFORMATION

Diode
 Green light when the thermostat is in standby
 Constant red light when the relay is switched on and the power is switched on
 Flashing red light in case of sensor fault or that the floor sensor is not connected

Terminal
 Use 1.5mm² or 2.5mm² as needed.

Heatit Controls AB declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

Standards: EMC 2014/30/EU, LVD 2014/35/EU, RoHS 2011/65/EU


RETURN AND RECYCLING

The product must be recycled as electronic waste.

DISCLAIMER

All electrical installations must be carried out by an authorized electrical installer.
 The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.thermo-floor.no/www.heatit.com og/eller documents.thermo-floor.no/documents.heatit.com
 Heatit Controls AS can not be held liable for any type of errors or omissions in our product information.
 Product specifications may change without further notice.

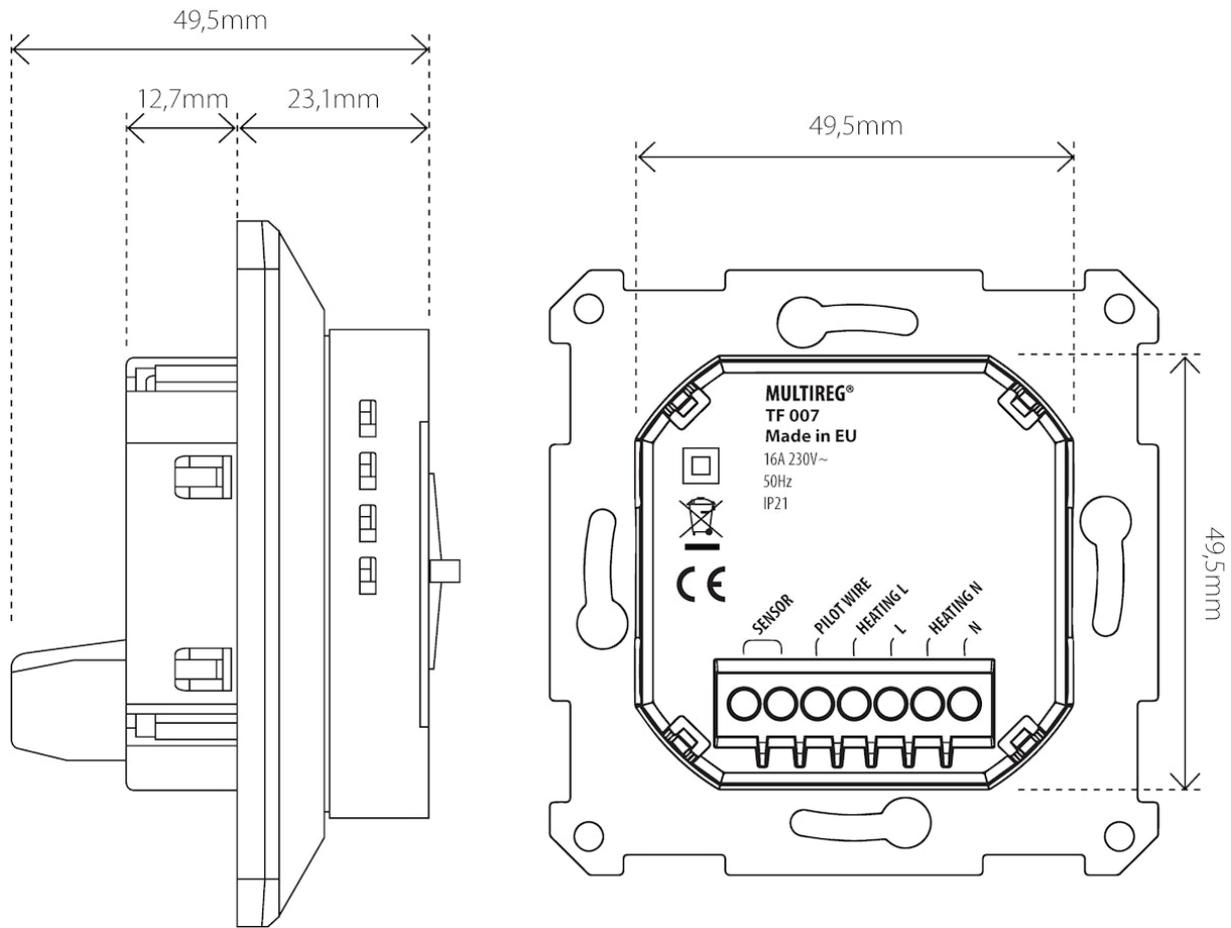

Multireg S-Control 3600W 16A can be ordered from
www.thermo-floor.no/5430333

All additional documentation are available on the above adress and on documents.heatit.no/5430333

