



## HEATIT Z-DIN 616

EOL

6 x 16A Z-Wave relay for DIN rail

**Art.no** 4512561

**GTIN** 7071236014324

Heatit Z-DIN 616 is a 6 x 16A potential free relay for DIN-rail mounting. The module is equipped with 6 relay switches and 6 digital inputs.

The 6 independent relay switches can be controlled freely through the Z-Wave network and may be used for many different purposes. For example, the 6 digital inputs may be connected to potential-free connectors or open collector outputs, and the inputs allow you to control other Z-Wave devices by sending commands through the Z-Wave network.

The Heatit DIN-rail module can be used for connecting 6 x 230VAC loads freely controllable from the Z-Wave network. All 6 relay outputs are galvanically separated. The 6 inputs of the DIN-rail module allow you to activate predefined scenes in a Z-Wave primary controller.

### PRODUCT FEATURES

- 6 x 16A potential free relays
- Potential free circuit control
- DIN-rail module with 6 relay outputs and 6 digital inputs
- Z-Wave interface for other systems in order to control them through the Z-Wave network
- Mounted on DIN-rail in switchboard
- 2-pole switch solution when using 2 x relays combined
- Supports encryption mode S0, S2 Authenticated Class, S2 Unauthenticated Class
- Firmware update (OTA)

### PRODUCT DATA

Ambient temperature range in use	5 to 40°C
Colour	Grey

### ADDITIONAL INFO

IP Code	IP20
Certification	Reach, RoHS
Warranty international	2 years
Customs number	85365000

### IOT / SMART HOME SPECIFIC DATA

Primary IoT Protocol	Z-Wave
Alternate IoT-communication protocols	No alternative communication protocols
Z-Wave Frequency	Z-Wave - 868.4 MHz (EU)
Z-Wave Chip	Z-Wave 500 chip
Z-Wave encryption mode	S2 Authenticated Class S2 Unauthenticated Class S0
Min radio frequency range	40m
Over The Air update (OTA)	Yes
Outputs	AC15: 360VA AC1: 16A 250V AC AC3: 750W (motor) 6 x 1-pole load (potential free)
Contacts type	Common Normally Open
Input connections	6 x 1-pol load (potential free 5mm distance), max10V DC
Input impedance	10kΩ

### ELECTRO TECHNICAL DATA

Voltage	24VDC
Voltage Output	24VDC
Own power usage	0.6W
Max load (resistive load)	40W
Max load (resistive load)	16A
Connection terminals diameter	0.2 to 2.5mm <sup>2</sup>
Max tightening torque connections	2N·m
Connection type	Screw clamps

**PRODUCT DIMENSIONS**

Product height/diameter	70mm	Product Width	140mm
Product length	100mm	Product net weight	280g

**MAINTENANCE**

The device is maintenance-free. Indoor use only.

**ADDITIONAL INFORMATION**

The product must be used with a security-enabled Z-Wave Controller in order to fully utilize security/encryption.

Standards: CE, EMC 2014/30/EU, EN 50491-3:2009, EN 60669-2: 2004, LVD 2014/35/EU, RoHS 2011/65/EU

**RETURN AND RECYCLING**

The product must be recycled as electronic waste.

**DISCLAIMER**


We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at [www.heatit.com](http://www.heatit.com) and/or [documents.heatit.com](http://documents.heatit.com)

Heatit Controls AS can not be held liable for any type of errors or omissions in our product information.

Product specifications may change without further notice.

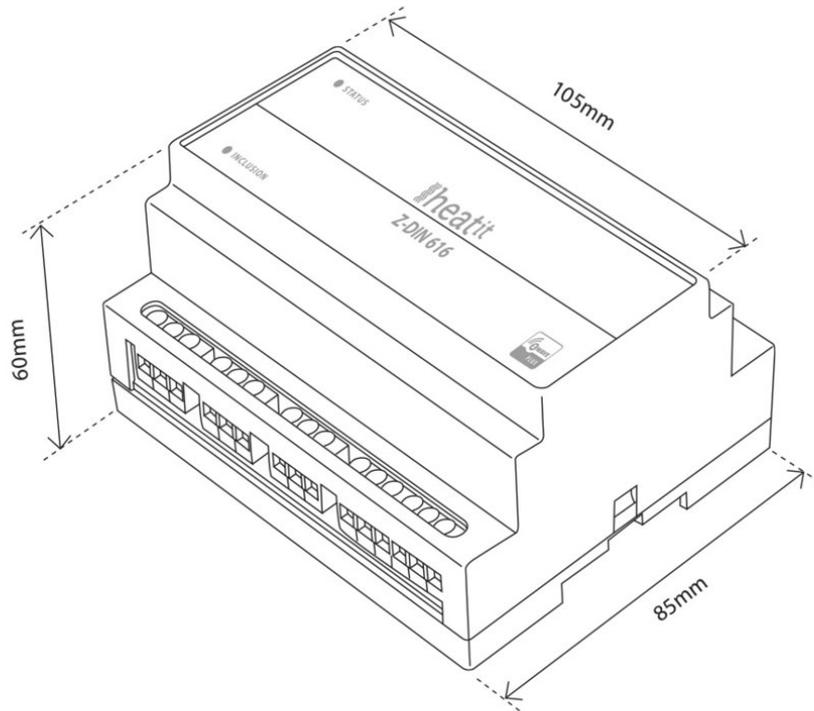

**Heatit Z-DIN 616 can be ordered from [www.heatit.com/4512561](http://www.heatit.com/4512561)**

All additional documentation are available on the above adress and on [documents.heatit.com/4512561](http://documents.heatit.com/4512561)

