



HEATIT Z-TRM2FX

EOL

Art.no	5430560
GTIN	7071236014850

Heatit Z-TRM2fx is an electronic thermostat for electric underfloor heating. Mounted in a standard wall box. The thermostat has a built-in Z-Wave chip that can be connected to control systems.

Heatit Z-TRM2fx is equipped with a single-pole break and fits into most frames used in Norway (System 55, Elko RS16, Schneider Exxact and Norvesco). The thermostat can withstand a load of max. 13A/2900W at 230V. At higher loads, the thermostat must control a contactor. The thermostat can be connected to two external sensors.

The thermostat can be connected in 5 associations, so that it can, for example, control 5 external relays, wall plugs etc.

The thermostat is designed for electric heating. Can be used for water-based heating if the thermostat is linked to Heatit Z-Water.

PRODUCT FEATURES

- Floor sensor
 - External room sensor (wired)
 - Temperature limiter
 - Weekly programme/night timer/day timer via gateway
 - Reading of temperature in gateway
 - Firmware update (OTA)
 - Current measurement
 - Relay status LED
 - Unipolar break
 - Lock/Child lock
 - Calibration
 - 5 associations
 - Supports encryption mode:
 - S0, S2 Authenticated Class
 - S2 Unauthenticated Class
- This is a Z-Wave Plus product with S2 security. In order to benefit from S2 security, your gateway must support S2 inclusion.

IOT / SMART HOME SPECIFIC DATA

Z-Wave Frequency	Z-Wave - 868.4 MHz (EU)
Z-Wave Chip	Z-Wave 500 chip

ELECTRO TECHNICAL DATA

Voltage	230VAC 50Hz
Max load (resistive load)	2900W
Own power usage	2W
Switch type	Two-pole switch

THERMOSTAT DATA

Compatible NTC-sensors (kΩ @ 25°C)	10, 12, 15, 22, 33, 47
Hysteresis	0,3 to 3,0 (default hysteresis 0,5)


STANDARDS

EN Standards	LVD 2014/35/EU RoHS 2011/65/EU EMC 2014/30/EU EN 60730-1	Certification	CE Z-Wave Plus
IP Code	IP21		

WARRANTY


Warranty Norway	5 years
-----------------	---------

LOGISTICAL DATA (F-PACK)

Width	110mm	Height/diameter	80mm
Length	120mm	Weight	240g
GTIN	7071236014850	Unit	EA
Consists of unit	EA	Quantity	1

DISCLAIMER

Use 1.5mm² or 2.5mm² depending on power requirements.

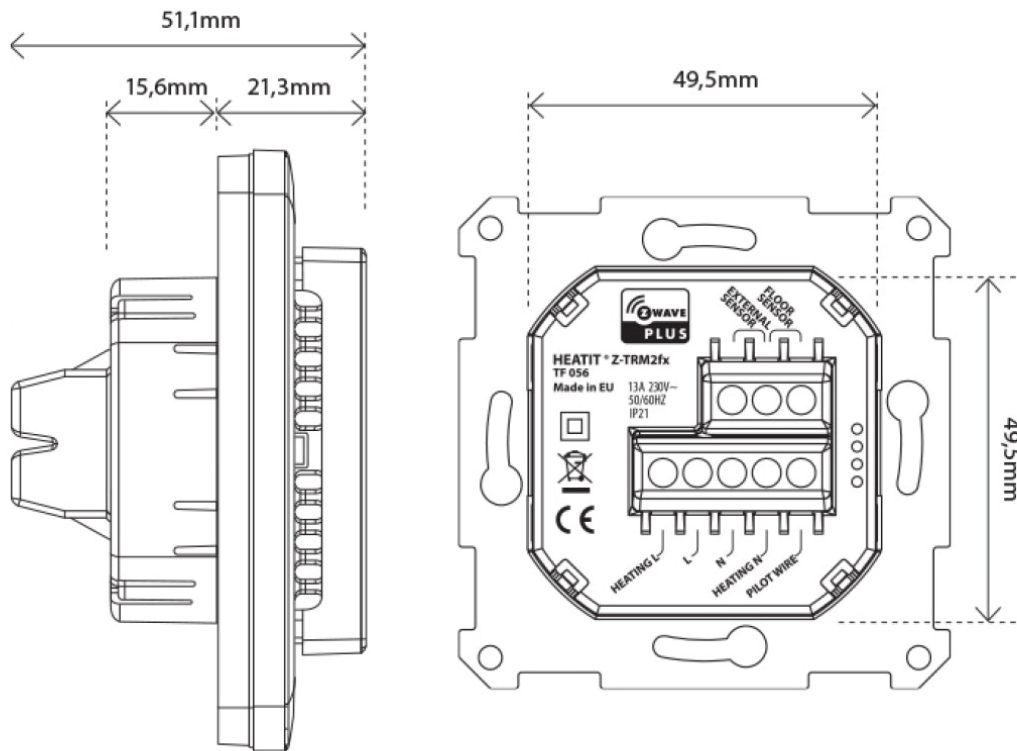

Heatit Z-TRM2fx can be ordered from www.heatit.com/5430560

All additional documentation are available on the above adress and on documents.heatit.com/5430560

