







PRODUCT FEATURES

• Z-Wave

Connector for external antenna

• 9 potential free relays

SmartStart

Valve exercise

• Firmware update (OTA)

- DIN-rail mounting
- Regulator for waterbased heating systems
- Can control 230VAC actuators and 24V actuators from an external power supply
- Can be used with Heatit thermostats in each heating zone
- Supports encryption mode S0, S2 Authenticated Class, S2 Unauthenticated Class

PRODUCT DATA	
Ambient temperature range in use	5 to 40°C
Ambient temperature range in storage	-30 to 70°C
Min. and max ambient humidity (RH%)	10 to 85%
Colour	Black Olive RAL 6015 Grey

ADDITIONAL INFO	
IP Code	IP20
Certification	CE, Z-Wave Plus
EN Standards	CE
Warranty international	2 years
Customs number	90321000
Country of origin	CN

HEATIT Z-WATER2

Z-Wave Regulator 868.4 MHz

Art.no 4512495

GTIN 7071236016458

Heatit Z-Water2 is a DIN-rail regulator for controlling waterbased heating systems. The module clips right onto a DIN-rail and allows you to control your waterbased heating through your Z-Wave network. Heatit Z-Water2 is equipped with 9 potential free relays for actuators. It also has 2 analog inputs for temperature sensors.

The Heatit Z-Water2 relays may be controlled by associations with other Z-Wave thermostats e.g Heatit. Each relay can control one or several actuators in your heating system.

101	/	SMAKI	HOME	SPECI	FIC DATA
-----	---	-------	------	-------	----------

Z-Wave Frequency	Z-Wave - 868.4 MHz (EU)
Z-Wave Chip	Z-Wave 800 chip
Z-Wave encryption mode	S2 Authenticated Class S0
	S2 Unauthenticated Class
Min radio frequency range	40m
Over The Air update (OTA)	Yes

ELECTRO TECHNICAL DATA

Voltage	230VAC 50Hz
Own power usage	0.4W
Max load (resistive load)	5A
Connection terminals diameter	0.2 to 2.5mm ²
Max tightening torque connections	2N·m
Connection type	Screw clamps







PRODUCT DIMENSIONS					
58mm	Product Width	86mm			
105mm	Product net weight	186g			
	58mm	58mm Product Width	58mm Product Width 86mm		

MAINTENANCE

The device is maintenance-free. Indoor use only.

ADDITIONAL INFORMATION

The product must be used with a security-enabled Z-Wave Controller in order to fully utilize security/encryption.

Max load: 5A

Max load per relay: 1385VA/150W Max relay current: 250VAC

Heatit Z-Water2 is incompatible with Heatit Z-Wave Gateway.

Accessories: Heatit DIN Trafo 24V, Art. no. 54 304 57

RETURN AND RECYCLING

The product must be recycled as electronic waste.


DISCLAIMER

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).


All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.heatit.com and/or documents.heatit.com Heatit Controls AS can not be held liable for any type of errors or omittances in our product information. Product specifications may change without further notice.







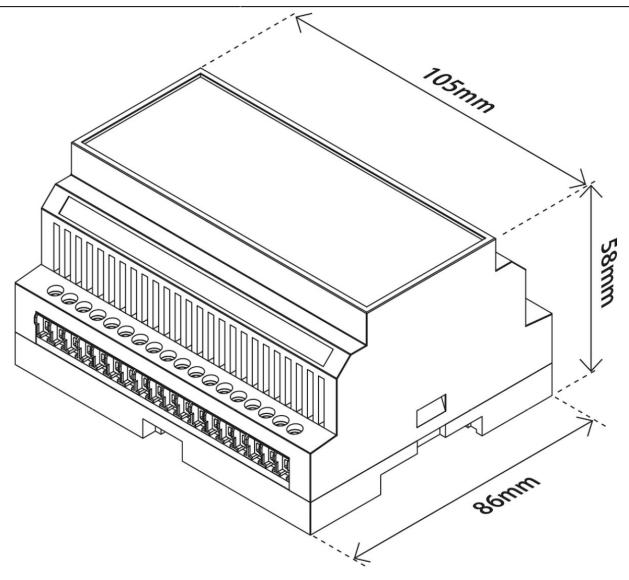

Heatit Z-Water2 can be ordered from www.heatit.com/4512495

All additional documentation are available on the above adress and on documents.heatit.com/4512495



