



## HEATIT WiFi6 THERMOSTAT WHITE RAL 9010

Wi-Fi Thermostat 3600W 16A

<b>Art.no</b>	5430541
<b>GTIN</b>	7071236018100

Smart thermostat. Heatit WiFi6 is an electronic thermostat designed for electrical heating and water based heating control. The thermostat can be controlled via Wi-Fi or Bluetooth (BLE) using the "MyHeatit" App or with the buttons on the front of the thermostat. The thermostat features a user-friendly interface, complies with the Eco-Design directive and has an easy-to-read LCD display.

Heatit WiFi6 has 3 modes: Heat - Cool and Eco.

The thermostat fits in standard European junction boxes and may be used with most System 55 frames. It has a sturdy metal frame for secure fastening in the junction box. The thermostat has a built-in room temperature sensor. Two additional external temperature sensors may also be connected.

The installer configures the system via Wi-Fi. If Wi-Fi is not available, the system can be configured via Bluetooth. After the system is set up, the installer can add the property to the customer. The customer can then add the system to their local Wi-Fi network.

All our new Heatit products with Wi-Fi support will be supported through our app; "MyHeatit". In the "MyHeatit" App, you can create your own profiles such as "Home - Away - Night - Holiday" and thus control, monitor and organize all the connected devices, or control them via weekly schedule.

When used with Wi-Fi, the thermostat can communicate over a local API, allowing the user to integrate it with a local gateway, server, controller that offers such a service, without the need to connect it to the cloud. The device also supports Amazon Alexa and Google Home (support for Amazon Alexa and Google Home is pending).

Heatit WiFi6 features active power metering, providing real-time information about your power consumption. It also allows you to manually set the power metering value when connected to a contactor.

The device is equipped with ZeroX™ technology, which ensures the relay switches at 0V when turning on and off. This technology significantly extends the thermostat's lifespan.

**Electrical Load Compatibility**  
The thermostat is designed specifically for resistive loads. When controlling large resistive, capacitive, or inductive loads, it is essential to use an appropriate contactor to protect the thermostat from excessive load to ensure safe operation.

The thermostat can withstand a resistive load of up to 16A/3600W at 230VAC. For loads above 13A, we recommend using a contactor.

### PRODUCT FEATURES

- Wi-Fi (2.4GHz)/BLE thermostat
- Open API for integration
- LCD display
- Internal room sensor
- Floor sensor
- 3 modes: Heat - Cool - Eco
- Power regulator
- Temperature limiter
- Temperature calibration
- Hysteresis/PWM
- Profiles; Home - Away - Night - Holiday
- External room sensor (wired by cable)
- Google Home and Amazon Alexa (pending)
- ZeroX™ detection
- Open window detection
- Relay status icon
- Adjustable display brightness
- Single poled switch
- Lock mode/child lock
- Weekly schedule in app
- Active power metering
- Firmware update (OTA)

### PRODUCT DATA

Ambient temperature range in use	5 to 40°C
Ambient temperature range in storage	-30 to 70°C
Min/max installation temperature	5 to 40°C
Min. and max ambient humidity (RH%)	10 to 85%
Material	Polycarbonate (PC)
Colour	White RAL 9010
Mounting	European Junction Box System 55

### THERMOSTAT DATA

Regulation temperature	5 to 40°C
Compatible NTC-sensors (kΩ @ 25°C)	6.8, 10, 12, 15, 22, 33, 47, 100
Outbound connections	1
Power regulator	Timed cycle 0-30 minutes
Temperature sensitivity	±0,5
Error margin temperature	0,5
Hysteresis	0,3 to 3,0 (default hysteresis 0,5)
Ohm value at 25°C	10kΩ
Max length of NTC sensor	50m

### ADDITIONAL INFO

IP Code	IP21
Certification	LVD, Reach, RED, RoHS
EN Standards	CE, Nemko
Warranty international	2 years
Customs number	90321000
Country of origin	CN

### IOT / SMART HOME SPECIFIC DATA

Primary IoT Protocol	WiFi Bluetooth
Alternate IoT-communication protocols	WiFi (802.11 b/g/n) 2,4GHz Bluetooth® low energy
Push buttons	3
Temperature measurement range	-10 to 60°C
Over The Air update (OTA)	Yes

### ELECTRO TECHNICAL DATA

Voltage	230VAC 50Hz
Voltage Output	230VAC 50Hz
Grounding	No
Switch type	One-pole switch
Own power usage	2W
Max load (resistive load)	3600W
Max load (resistive load)	16A
Connection terminals diameter	0.2 to 2.5mm²
Max tightening torque connections	2N·m
Connection type	Screw clamps
Method of control	Button regulation Regulation via App



## PRODUCT DIMENSIONS

Product height/diameter	84mm	Product Width	84mm
Product length	45.5mm	Product net weight	136g

## MAINTENANCE

The device is maintenance-free. Indoor use only.

## ADDITIONAL INFORMATION

Downtime related to the app or cloud/service platform is not covered by the warranty.

Heatit Controls AB declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

## RETURN AND RECYCLING

The product must be recycled as electronic waste.

## DISCLAIMER

Approved for use in bathrooms.

Never change the front from one thermostat to another.

General info;

Worth noting regarding correct installation of thermostats.

When two or more thermostats are mounted too close to each other, the heat they emit, can interfere with the temperature sensors and the temperature in the junction box becomes too high. This can cause inaccurate temperature readings, especially under high load, leading to incorrect heating control. To avoid such issues, thermostats should be installed as far apart as possible and always in separate junction boxes. This ensures more accurate temperature readings.

In multi-frames with multiple units, the thermostat should always be mounted at the bottom, and no more than one thermostat should ever be installed in a multi-frame.

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.


Updated documentation is available at [www.heatit.com](http://www.heatit.com) and/or [documents.heatit.com](http://documents.heatit.com)

Heatit Controls AS can not be held liable for any type of errors or omissions in our product information.

Product specifications may change without further notice.

# HEATIT WiFi6 THERMOSTAT

## DIMENSIONS

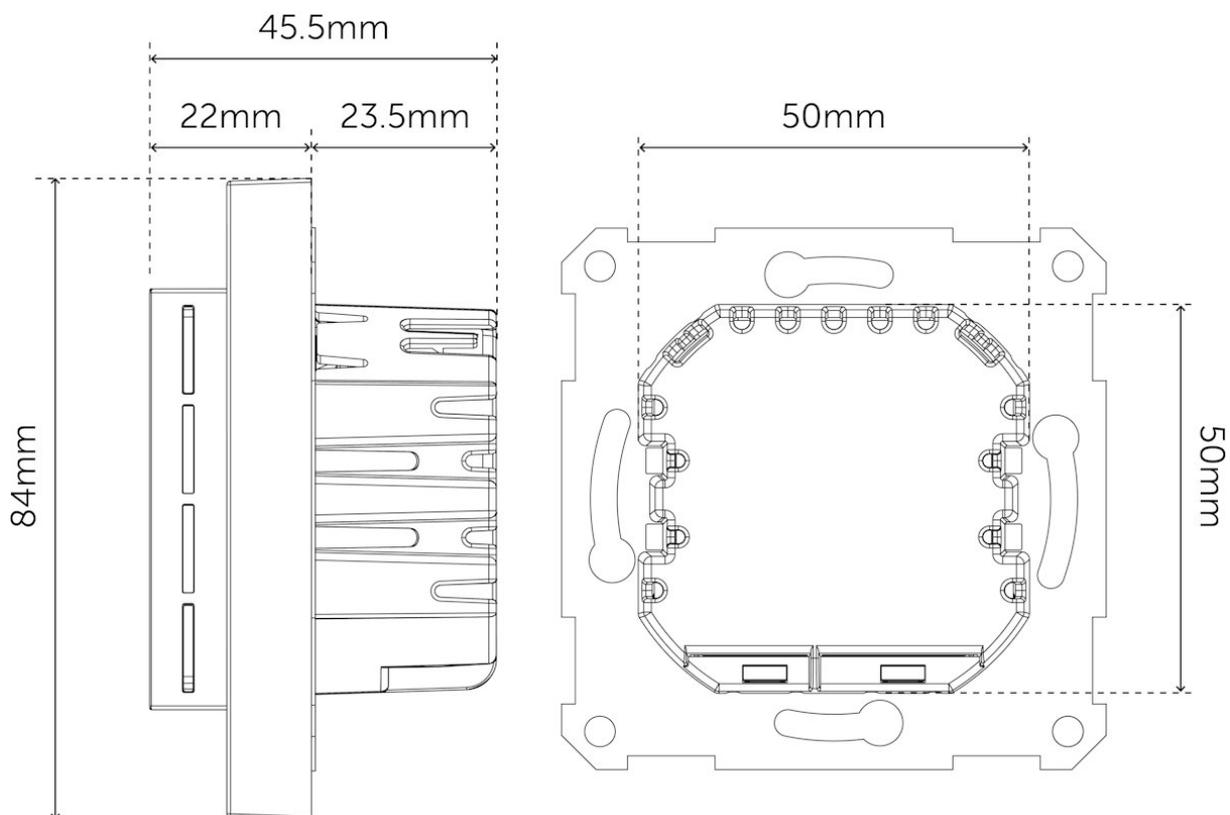

**Heatit WiFi6 Thermostat White RAL 9010 can be ordered from [shop.heatit.com/5430541](https://shop.heatit.com/5430541)**

All additional documentation are available on the above adress and on [documents.heatit.com/5430541](https://documents.heatit.com/5430541)

