

DATA SHEET

Document generated 5. Dec 2025 kl. 17:00







PRODUCT FEATURES

- Wi-Fi (2.4GHz)/BLE thermostat
- Open API for integration
- LCD display
- Internal room sensor
- · Floor sensor
- 3 modes: Heat Cool Eco
- Power regulator
- Temperature limiter
- Temperature calibration
- · Hysteresis/PWM
- Profiles; Home Away Night Holiday
- External room sensor (wired by cable)
- Google Home and Amazone Alexa (pending)

ZeroX™ detection

- Open window detection
- Relay status icon
- · Adjustable display brightness
- Single poled switch
- · Lock mode/child lock
- · Weekly schedule in app
- Active power metering
- Firmware update (OTA)

PRODUCT DATA

| Ambient temperature range in use | 5 to 40°C |
|--------------------------------------|-----------------------|
| Ambient temperature range in storage | -30 to 70°C |
| Min/max installation temperature | 5 to 40°C |
| Min. and max ambient humidity (RH%) | 10 to 85% |
| Material | Polycarbonate (PC) |
| Colour | White RAL 9003 |
| Mounting | European Junction Box |

THERMOSTAT DATA

| 5 to 40°C | |
|-------------------------------------|--|
| 6.8, 10, 12, 15, 22, 33, 47, 100 | |
| 1 | |
| Timed cycle 0-30 minutes | |
| ±0,5 | |
| 0,5 | |
| 0,3 to 3,0 (default hysteresis 0,5) | |
| 10kΩ | |
| 50m | |
| | |

ADDITIONAL INFO

| ADDITIONAL INFO | |
|------------------------|-----------------------|
| IP Code | IP21 |
| Certification | LVD, Reach, RED, RoHS |
| EN Standards | CE, Nemko |
| Warranty international | 2 years |
| Customs number | 90321000 |
| Country of origin | CN |
| | |

HEATIT WIFI6 WHITE RAL 9003

Wi-Fi Thermostat 3600W 16A

Art.no 5430542 **GTIN** 7071236018117

Smart thermostat. Heatit WiFi6 is an electronic thermostat designed for electrical heating and water based heating control. The thermostat can be controlled via Wi-Fi or Bluetooth (BLE) using the "MyHeatit" App or with the buttons on the front of the thermostat. The thermostat features a user-friendly interface, complies with the Eco-Design directive and has an easy-to-read LCD display.

Heatit WiFi6 has 3 modes: Heat - Cool and Eco.

The thermostat fits in standard European junction boxes and may be used with most System 55 frames. It has a sturdy metal frame for secure fastening in the junction box. The thermostat has a built-in room temperature sensor. Two additional external temperature sensors may also be connected.

The installer configures the system via Wi-Fi. If Wi-Fi is not available, the system can be configured via Bluetooth. After the system is set up, the installer can add the property to the customer. The customer can then add the system to their local Wi-Fi network.

All our new Heatit products with Wi-Fi support will be supported through our app; "MyHeatit". In the "MyHeatit" App, you can create your own profiles such as "Home – Away – Night – Holiday" and thus control, monitor and organize all the connected devices, or control them via weekly schedule.

When used with Wi-Fi, the thermostat can communicate over a local API, allowing the user to integrate it with a local gateway, server, controller that offers such a service, without the need to connect it to the cloud. The device also supports Amazon Alexa and Google Home (support for Amazon Alexa and Google Home is pending).

Heatit WiFi6 features active power metering, providing real-time information about your power consumption. It also allows you to manually set the power metering value when connected to a contactor.

The device is equipped with ZeroX™ technology, which ensures the relay switches at 0V when turning on and off. This technology significantly extends the thermostat's lifespan.

The thermostat can withstand a resistive load of up to 16A/3600W at 230VAC. For loads above 13A, we recommend using a contactor.

The thermostat is designed for resistive loads. When using large resistive, capacitive, or inductive loads, a contactor should be used.

| IOT / SMART | HOME SPECIFIC | DATA |
|-------------|----------------------|------|
| , | | |

| Primary IoT Protocol | WiFi |
|---------------------------------------|----------------------------|
| · | Bluetooth |
| Alternate IoT-communication protocols | Bluetooth® low energy |
| | WiFi (802.11 b/g/n) 2,4GHz |
| | |
| Min radio frequency range | 30m |
| Push buttons | 3 |
| Temperature measurement range | -10 to 60°C |
| Over The Air update (OTA) | Yes |

ELECTRO TECHNICAL DATA

| 230VAC 50Hz |
|---|
| 230VAC 50Hz |
| No |
| One-pole switch |
| 2W |
| 3600W |
| 16A |
| 0.2 to 2.5mm ² |
| 2N·m |
| Screw clamps |
| Regulation via App Button regulation |
| |

















PRODUCT DIMENSIONS

| Product height/diameter | 84mm | Product Width | 84mm |
|-------------------------|--------|--------------------|------|
| Product length | 45.5mm | Product net weight | 136g |

MAINTENANCE

The device is maintenance-free. Indoor use only.

ADDITIONAL INFORMATION

Approved for use in bathrooms.

Downtime related to the app or cloud/service platform is not covered by the warranty.

ZeroX[™] Detection is pronounced Zero Cross Detection.

Heatit Controls AB declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.

RETURN AND RECYCLING

The product must be recycled as electronic waste.

DISCLAIMER

The thermostat can withstand a resistive load of up to 16A/3600W at 230VAC. For loads above 13A, we recommend using a contactor.

Never change the front from one thermostat to another.

General info;

Worth noting regarding correct installation of thermostats.

When two or more thermostats are mounted too close to each other, the heat they emit, can interfere with the temperature sensors and the temperature in the junction box becomes too high. This can cause inaccurate temperature readings, especially under high load, leading to incorrect heating control. To avoid such issues, thermostats should be installed as far apart as possible and always in separate junction boxes. This ensures more accurate temperature readings.

In multi-frames with multiple units, the thermostat should always be mounted at the bottom, and no more than one thermostat should ever be installed in a multi-frame.

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.heatit.com and/or documents.heatit.com
Heatit Controls AS can not be held liable for any type of errors or omittances in our product information.
Product specifications may change without further notice.












HEATIT WIFI6 THERMOSTAT

DIMENSIONS

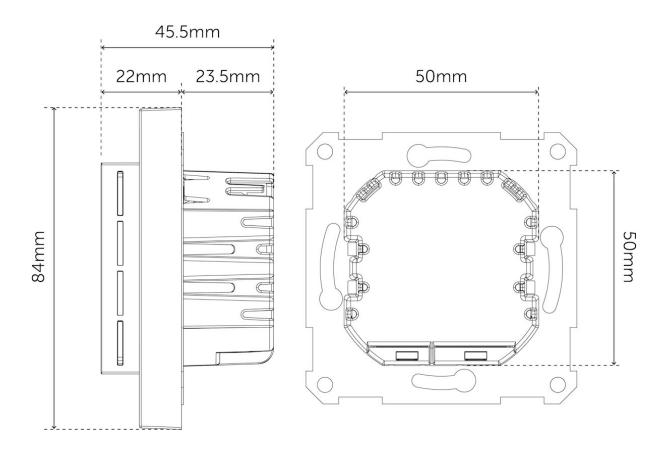

Heatit WiFi6 White RAL 9003 can be ordered from www.heatit.com/5430542

All additional documentation are available on the above adress and on documents.heatit.com/5430542











