

PRODUCT FEATURES

- Frost protection of Pex water pipes

TF PEXGUARD - PIPE-IN-PIPE 10W/M

Self-limiting heating cabel - frost protection of Pex water pipes 10W

Art.no	1011307
GTIN	7071236016281

TF PexGuard is a self-limiting heating cable for frost protection of water pipes, type of pipe in pipe. The heating cable is mounted between the pipes in a Pex water pipe to keep it frost-free during cold periods.

According to the building regulations, a new home has high requirements for insulation. The challenge with frozen water pipes comes when the insulation does not emits some heat in the outer walls or in the floor divisions. Thus, small chills occur against the water pipe and the water freezes. PexGuard heating cable is designed to provide a small local heating that ensures that the water does not freeze.

The work with the water pipe should be carried out by plumber. Connection of heating cable and thermostat must always be done by an authorized electrical installer.

PRODUCT DATA

Voltage	230VAC
Cable type	Self limiting heating cable
Grounding	Braided, tinned copper wires
Effect pr. meter (watt pr. running meter)	10W
Bus conductor	Nickel Coated Copper Wire
Max temperature without load	85°C
Max temperature with load	65°C
Min bend radius (mm)	25mm
Weight per meter (gram)	49g
Min/max installation temperature	-40 to 30°C
Colour	Silver
Outer sleeve material	Copper
IP Code	IPX7
Certification	Reach, RoHS
EN Standards	CE, EN 60800, EN 62395
Warranty international	2 years
Customs number	85168000



PRODUCT DIMENSIONS

Product height/diameter	3.9mm	Product Width	6.8mm
Product length	1000mm	Product net weight	49g

MAINTENANCE

The product is maintenance-free, but it must always be installed in compliance with the manual. The product should be checked and tested annually.

ADDITIONAL INFORMATION

In the Nordic climate, insulation will not be sufficient for full frost protection of pipes. Tough weather conditions with wind and cold can lead to frozen water pipes, sprinkler systems etc.

Self-limiting heating cables are built up with a temperature-dependent resistance element between two parallel copper conductors. When the self-limiting heating cable is connected to the mains voltage, the current will pass through the temperature-dependent resistance element, which is heated. When the element heats up, the resistance value rises. As a result, power consumption and heat fall again. This is what we call a self-limiting effect. This regulation of the power takes place anywhere on the cable and is adapted to the current ambient temperature.

Self-limiting heating cables have a high starting current depending on length and temperature. Fuses with C-characteristics must therefore always be used.

Special lengths with attached cold lead can be made to order.
The cable can be cut to the desired length.

PRODUCT INFO RETURN AND RECYCLING

The product must be recycled as electric waste.

DISCLAIMER

Prerequisites:

230VAC nominal voltage.
Delayed circuit breakers with (C-type) max load 80%.
Max 10% voltage drop on bus conductors.

The self-limiting heating cable can be cut to the desired length.

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).


All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.thermo-floor.no and/or documents.thermo-floor.no
Thermo-Floor AS can not be held liable for any type of errors or omissions in our product information.
Product specifications may change without further notice.




Kabelsnitt / Cable cross section

TF PexGuard
TF PexGuard

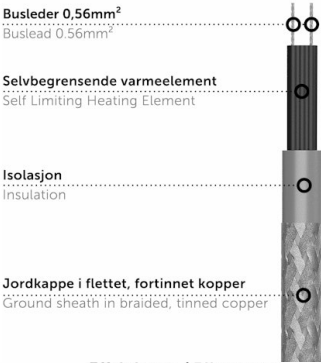

Effektkurve / Effect curve

TF PexGuard
TF PexGuard

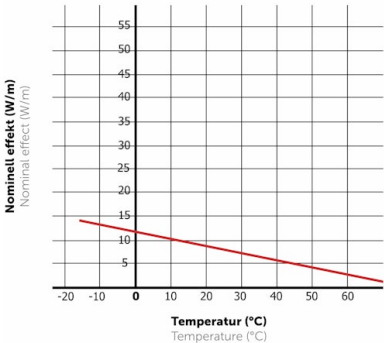

Sikring, maks kabellengde / Fuse, max cable length

TF PexGuard
TF PexGuard

TEMPERATUR VED TILKOBLING (°C) TEMPERATURE AT CONNECTION (°C)	NOMINELLT BRYTERNIVÅ (A) NOMINALLY BRIDGE LEVEL (A)	MAKS. KABELLENGDE (m) VED 230VAC MAX. CABLE LENGTH (m) AT 230VAC
		TF PEXGUARD 10W
10°C	16A	90m
0°C	16A	80m
-10°C	16A	70m

TF PexGuard - pipe-in-pipe 10W/m can be ordered from
www.thermo-floor.no/1011307

All additional documentation are available on the above adress and on documents.thermo-floor.no/1011307

