



TF SBG-T2

Self-limiting heating cable - frost protection roofs and gutters

HC SBG-T2 is a self-regulating heating cable developed for effective frost protection of gutters and downspouts. With an operating temperature of up to 80°C, the cable withstands significantly higher loads than most comparable products on the market, which typically max out at 65°C. The cable is UV-resistant for reliable outdoor use year after year, and is supplied by the meter so it can easily be adapted to any roof, gutter, or downspout — without complicated calculations. A robust and flexible choice for residential, commercial, and industrial installations.

PRODUCT FEATURES

- Tanks and containers – frost protection for water tanks, septic tanks, and storage tanks.
- Refrigeration and freezer facilities – temperature maintenance and frost protection of piping in the refrigeration industry.
- Agriculture – frost protection of drinking water lines for livestock, irrigation systems.
- Holiday homes/cabins – frost protection of incoming water and drainage pipes during periods without heating.
- Pump stations and manholes/chambers – frost protection of pipes and equipment in exposed chambers.
- Industrial facilities – general frost protection and temperature maintenance of piping systems in industrial processes.
- Parking garages/drainage channels – frost protection of drains and gutters in exposed areas.

GROUND PROTECTION/RCD/THERMOSTAT

The heating system must be equipped with an RCD with a maximum trip value of 30mA.

The heating system must be installed with an electronic thermostat for energy efficiency and temperature control.

PRODUCT DATA

Voltage	230VAC
Cable type	Self limiting heating cable
Grounding	Helically wrapped aluminum foil with return conductor
Effect pr. meter (watt pr. running meter)	15W
Bus conductor	Nickel Coated Copper Wire
Max temperature (average)	65°C
Max temperature without load	85°C
Max temperature with load	65°C
Min bend radius (mm)	25mm
Weight per meter (gram)	100g
Ambient temperature range in use	-30 to 65°C
Ambient temperature range in storage (°C)	-30 to 85°C
Min/max installation temperature	-30 to 40°C
Min. and max ambient humidity (RH%)	0 to 85%
Colour	Black
Outer sleeve material	Polyolefin
IP Code	IPX7
Certification	Reach, RoHS
EN Standards	CE
Warranty in Norway	5 years
Warranty international	2 years
Product height/diameter	5.8mm
Product Width	10.5mm
Product length	1000mm
Customs number	85168000

Product Overview

Art no.	Product	Effect per m.	
10 112 23	TF SBG-T2 Black 15W/m	15W	
10 112 24	TF SBG-T2 Black 25W/m	25W	

ADDITIONAL INFORMATION

In the Nordic climate, insulation will not be sufficient for full frost protection of pipes. Tough weather conditions with wind and cold can lead to frozen water pipes, sprinkler systems etc.

Self-limiting heating cables are built up with a temperature-dependent resistance element between two parallel copper conductors. When the self-limiting heating cable is connected to the mains voltage, the current will pass through the temperature-dependent resistance element, which is heated. When the element heats up, the resistance value rises. As a result, power consumption and heat fall again. This is what we call a self-limiting effect. This regulation of the power takes place anywhere on the cable and is adapted to the current ambient temperature.

Self-limiting heating cables have a high starting current depending on length and temperature. Fuses with C-characteristics must therefore always be used.

Special lengths with attached cold lead can be made to order.
The cable can be cut to the desired length.

MAINTENANCE

The product is maintenance-free, but it must always be installed in compliance with the manual. The product should be checked and tested annually.

RETURN AND RECYCLING

The product must be recycled as electric waste.

DISCLAIMER

Prerequisites:

230VAC nominal voltage.

Delayed circuit breakers with (C-type) max load 80%.

Max 10% voltage drop on bus conductors.

The self-limiting heating cable can be cut to the desired length.

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.heatit.com or documents.heatit.com

Heatit Controls AS can not be held liable for any type of errors or omissions in our product information.

Product specifications may change without further notice.

Kabelsnitt / Cable cross section

TF SBG-T2


TF SBG-T2



Effektcurve / Effect curve

TF SBG-T2

TF SBG-T2

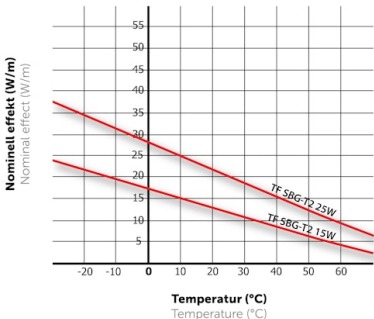

Sikring, maks kabellengde / Fuse, max cable length

TF SBG-T2

TF SBG-T2

TEMPERATUR VED TILKOBLING (°C) TEMPERATURE AT CONNECTION (°C)	NOMINELT BRYTERNIVÅ (A) NOMINALLY BRIDGE LEVEL (A)	MAKS. KABELLENGDE (m) VED 230VAC MAX CABLE LENGTH (m) AT 230VAC	
		TF SBG-T2 15W/M	TF SBG-T2 25W/M
10°C	16A	115m	92m
	20A	120m	98m
0°C	16A	105m	83m
	20A	110m	93m
-10°C	16A	95m	75m
	20A	100m	85m
-30°C	16A	93m	68m
	20A	95m	72m

Kabelsnitt / Cable cross section

TF SBG-T2


TF SBG-T2



Effektcurve / Effect curve

TF SBG-T2

TF SBG-T2



Sikring, maks kabellengde / Fuse, max cable length

TF SBG-T2

TF SBG-T2

TEMPERATUR VED TILKOBLING (°C) TEMPERATURE AT CONNECTION (°C)	NOMINELT BRYTERNIVÅ (A) NOMINALLY BRIDGE LEVEL (A)	MAKS. KABELLENGDE (m) VED 230VAC MAX CABLE LENGTH (m) AT 230VAC	
		TF SBG-T2 15W/M	TF SBG-T2 25W/M
10°C	16A	115m	92m
	20A	120m	98m
0°C	16A	105m	83m
	20A	110m	93m
-10°C	16A	95m	75m
	20A	100m	85m
-30°C	16A	93m	68m
	20A	95m	72m

ThermoFloor

For mer dokumentasjon scan QR



thermo-floor.no