



## HEATIT Z-PUSH BUTTON 8 BLACK

**EOL**

Push button for Z-wave

**Art.no** 4512681  
**GTIN** 7071236015130

Heatit Z-Push Button8 is a battery operated wall switch with 8 push-buttons. The switch enables you to control the Z-Wave-products in your smart home system. Managing your Z-Wave products becomes easy and practical. The switch can be set up to control scenarios or work in associations with other Z-Wave products.

Heatit Z-Push Button8 can control 4 association groups with up to 20 products or up to 16 scenarios through your gateway. Heatit Z-Push Button8 may not be used as a stand-alone unit; it must be included in a gateway to function.

The switch fits into System 55 frames.

The switch is easy to install, and may be fastened with screws or double-sided tape.

### PRODUCT FEATURES

- Battery operated wall switch
- Fits System 55 frames
- Controls 4 separate groups and up to 20 units
- Controls up to 16 scenarios via your gateway
- Easy to install with screws or double-sided tape
- Supports encryption modes S0, S2 Authenticated Class, S2 Unauthenticated Class

### PRODUCT DATA

|                                  |           |
|----------------------------------|-----------|
| Colour                           | Black     |
| Ambient temperature range in use | 0 to 40°C |

### STANDARDS

|               |                     |
|---------------|---------------------|
| EN Standards  | CE, RoHS 2011/65/EU |
| Certification | CE, Z-Wave Plus     |
| IP Code       | IP20                |

### WARRANTY

### IOT / SMART HOME SPECIFIC DATA

|                           |  |
|---------------------------|--|
| Z-Wave Frequency          | Z-Wave - 868.4 MHz (EU)                                  |
| Z-Wave Chip               | Z-Wave 500 chip  |
| Min radio frequency range | 40m  |
| Push buttons              | 8  |
| Z-Wave encryption mode    | S0<br>S2 Authenticated Class<br>S2 Unauthenticated Class |
| FLiRS                     | No   |

### ELECTRO TECHNICAL DATA

|         |                    |
|---------|--------------------|
| Voltage | Batteri 1 x CR2450 |
|---------|--------------------|

**PRODUCT DIMENSIONS**

|                         |       |                    |       |
|-------------------------|-------|--------------------|-------|
| Product height/diameter | 54mm  | Product Width      | 112mm |
| Product length          | 103mm | Product net weight | 66g   |

**MAINTENANCE**

The device is maintenance-free.

**ADDITIONAL INFORMATION**

This product is a security-enabled Z-Wave Plus product with encryption. The product must be used with a security-enabled Z-Wave Controller in order to fully utilize the product.

**DISCLAIMER**


We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at [www.heatit.com](http://www.heatit.com) and/or [documents.heatit.com](http://documents.heatit.com)

Heatit Controls AB can not be held liable for any type of errors or omissions in our product information.

Product specifications may change without further notice.

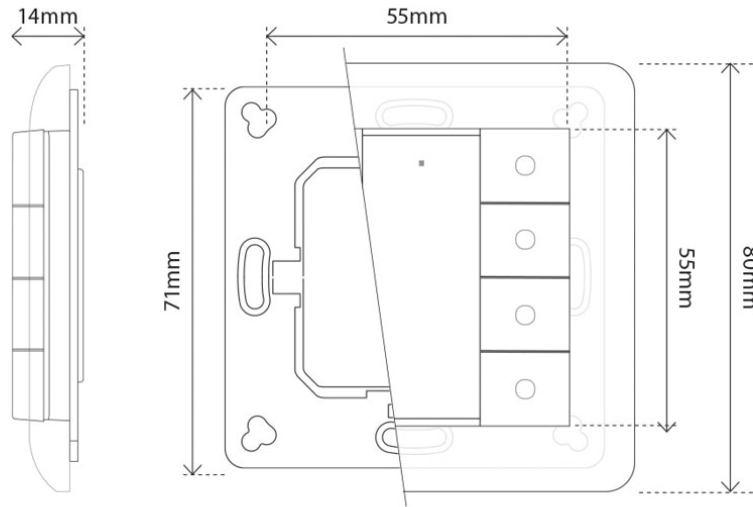

**Heatit Z-Push Button 8 Black can be ordered from  
[www.heatit.com/4512681](http://www.heatit.com/4512681)**

All additional documentation are available on the above adress and on [documents.heatit.com/4512681](http://documents.heatit.com/4512681)

